

PM5003

## Integrated Amplifier



Looking for Marantz quality in a modestly powered integrated stereo amplifier? The PM5003 may be just what you need. Great in a starter system for a music aficionado or for a "second system" in summer homes, dens, or dorms, this gem delivers the sonic excellence Marantz is known for in an attractive, easy-to-use package. Value priced as a first amp for many with performance that may well make it the last amp for some.


- Sophisticated new aluminum/reinforced resin front panel
- Current feedback amplifier circuit
- Discrete-component amplifier
- Input buffer circuit for High S/N & Ch. Separation
- Source Direct switch
- MM phono input
- Active Filter type Tone Control, Loudness
- 5 line-level inputs
- 2 Record outputs
- Transparent screw-type A/B speaker terminals
- Triple command code sets
- IR flasher input
- Detachable AC cord, Standby Mode
- 2 switched/1 unswitched outlets
- System remote controller

**marantz**<sup>®</sup>  
LIFE AMPLIFIED™

---

## Integrated Amplifier

IN/OUTPUTS	
<b>AUDIO</b>	
Main In/Pre Out	-
Bridge Mono Mode/Bi-Amp Mode	-
Headphone Out	1
Phono Input	MM
Analog L&R In	5
Analog L&R Out	2
<b>OTHER</b>	
External control	Flasher In: 1
D-Bus Remote (RC-5) In/Out	1/1
AC Outlets (Switched/Unswitched)	2/1
SPECIFICATIONS	
THD	0.01% (20Hz - 20kHz, 8 ohms)
Input Sensitivity/Impedance	PHONO (MM): 2.2mV/47k ohms, LINE: 200mV/20k ohms
Frequency Response	10Hz - 50kHz +0dB, -1dB
S/N Ratio	PHONO(MM): 83dB (5 mV input), LINE: 87dB (500 mV input) (IHF-A, 1W, 8 ohms)
Number of Channels	2
Output Power	40W (8 ohms), 55W (4 ohms) (20Hz - 20kHz)
HDAM	-
Power Transformer	EI
Current Feedback Amplifier	•
Speaker Terminal	Transparent Screw type x2 pair
Tone Control	Bass (100Hz): +/- 10dB, Treble (10kHz): +/- 10dB
Source Direct	•
Speaker A/B	•
GENERAL	
Color	Black
Front Panel	Aluminum/Glass-reinforced resin
Remote Control	Marantz System Remote Controller
Power Requirement	AC120V 60Hz
Power Consumption	110W (UL60065)
Dimensions W x H x D (Inches)	17 5/16" x 4 1/8" x 14 9/16"
Weight (lbs)	14.8

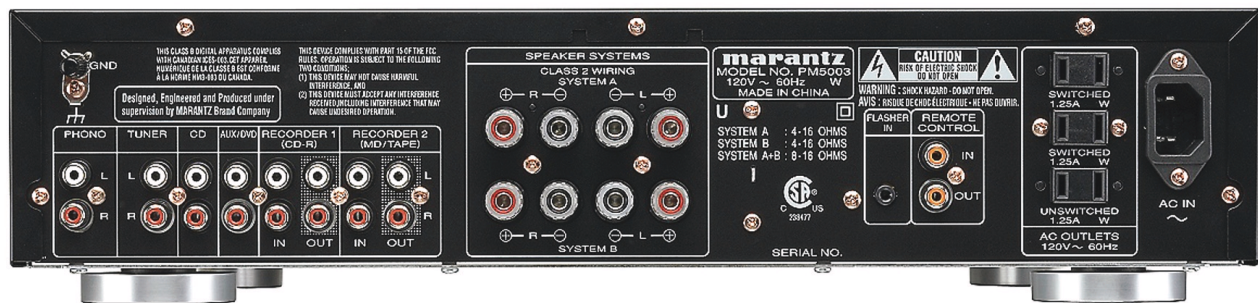

# marantz®

LIFE AMPLIFIED™

\*All specifications, dimensions and weights are subject to change without notice.  
 D&M Holdings, Marantz, Marantz America, Inc. or any of its subsidiaries will not assume any liability for errors in this spec sheet which may result in consequential errors being made by retail dealers, designers, custom installers, cabinet makers or end users, etc based upon information contained within this document.